


ECHO 150

Engineered product specification



-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-

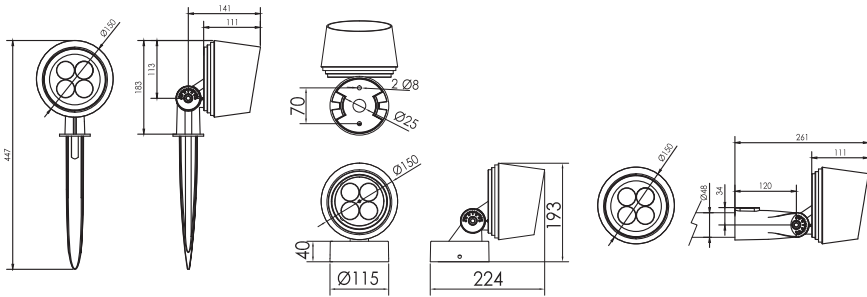

Power	15W	15W	20W	20W	20W
Luminous flux	1075lm	1213lm	1434lm	1617lm	1080lm
CCT	3000K	4000K	3000K	4000K	RGBW
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V	AC 220-240V	DC24V
Beam angles	12°, 20°, 30°, 60°, 10x70° & 5x20°				20° & 30°
CRI	80	80	80	80	
Surface mount Part No.	Echo150-153-CG-86	Echo150-154-CG-86	Echo150-203-CG-86	Echo150-204-CG-86	Echo150-20RGBW-CG-86
Including Spike Part No.	Echo150S-153-CG-86	Echo150S-154-CG-86	Echo150S-203-CG-86	Echo150S-204-CG-86	Echo150S-20RGBW-CG-86
Including Pole mount Part No.	Echo150P-153-CG-86	Echo150P-154-CG-86	Echo150P-203-CG-86	Echo150P-204-CG-86	Echo150P-20RGBW-CG-86