

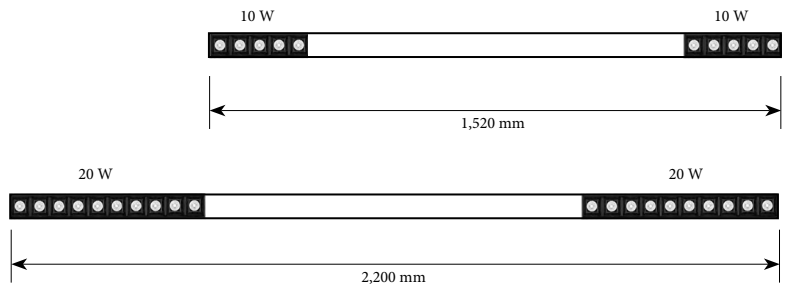
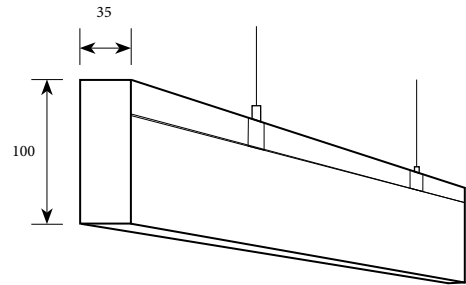
## LBS 35




Litenet presents the LBS range of surface mounted or suspended linear lights, this slim lined lighting system is designed is presented with die cast aluminium screwless end plates and are designed for commercial lighting applications, these fittings are ultra low glare ideal for movie theater, shopping centers, age care, office or health care lighting application this fitting is designed for comfort and mood lighting applications. The LBS collection offers a range of fixed, Adjustable and wall washer suspended direct and indirect lighting system with three beam angle light distribution. This fitting is a slim profile recessed fitting and is available in satin white or matte black powder coat finish. The standard range comes with SMD technology CR180, upon request CR190 can also be made available.

The LBS range is designed with a generous heat sink using die cast high grade aluminum to maximise heat dissipation which will intern maximise the life of the LED chip. This range of linear systems have deep conical housing to minimise uncomfortable glare.

Integral Non-dimmable ECG standard

Light fitting is designed to 50,000-hour L80 5-year warranty



-  SMD      3000K / 4000K
-  DC8V -DC42V      700mA
-  10-10V, DALI



Power	2 X 10W	2 X 20W
LED	SMD	SMD
Luminous flux 3K	856lm	1530lm
Luminous flux 4K	997lm	1779lm
Dimensions (L W H)	1500mm x 35mm x 100mm	2000mm x 35mm x 100mm
Spacing 0.75m working plane 320lx at 2.8m height	1,520mm x 1,800mm	2,200mm x 2,000mm
Beam Angles	15° 30° 45°	15° 30° 45°
CRI	80	80
3000K Part No	LBS32 20803	LBS32 40803
4000K Part No	LBS32 202804	LBS32 40804