



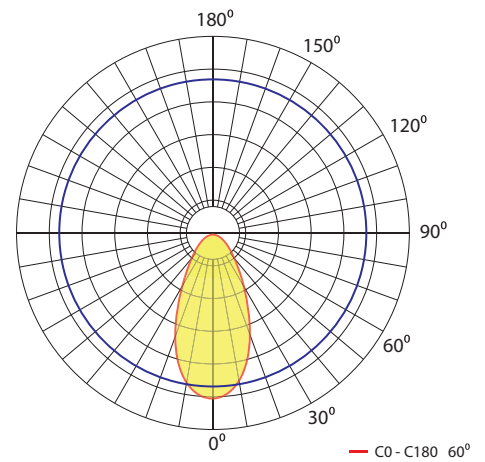


## ICON IP115

LITENET presents ICON IP115 a beautifully designed surface mounted round light fitting suitable for outdoor commercial lighting applications. The ICON IP115 is designed to create a living experience with high luminous efficacy of 94lm/w with the frosted diffuser. To maximise heat dissipation the ICON is constructed with premium grade aluminium. This surface mounted down light is created with anti glare properties including a deep set of aluminium reflector and dark light reflector. This surface mounted down light comes in powder coated Black or white finish.

Non-dimmable driver is standard  
 DALI dim is available  
 50,000-hour L80 5-year warranty



-  CREE COB      3000K / 4000K
-  DC25V -DC42V      350mA, 450mA
-  10-10V, DALI



Power	10W	15W	21.6W
LED	SMD	SMD	SMD
Luminous flux 3K	846 lm	1269 lm	1827 lm
Luminous flux 4K	940 lm	1410 lm	2031 lm
Dimensions	115mm x 130mm	115mm x 130mm	115mm x 130mm
Colour	White	White	White
Beam angles	60°	60°	60°
CRI	80	80	80
3000K Part No	ICON IP115 10803	ICON IP115 15803	ICON IP115 20803
4000K Part No	ICON IP115 10804	ICON IP115 15804	ICON IP115 20804